
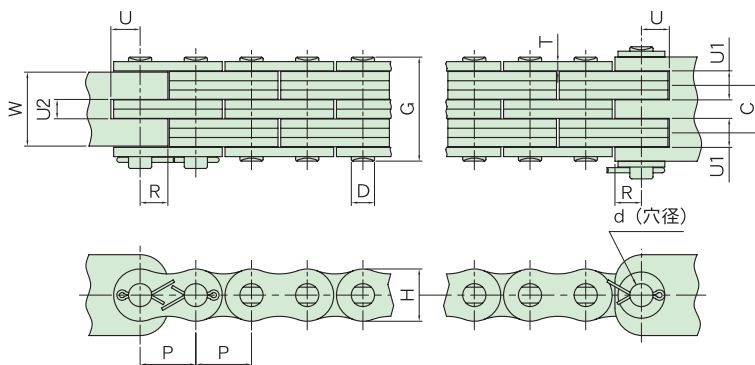


BL形 リーフチェーン

標準列数

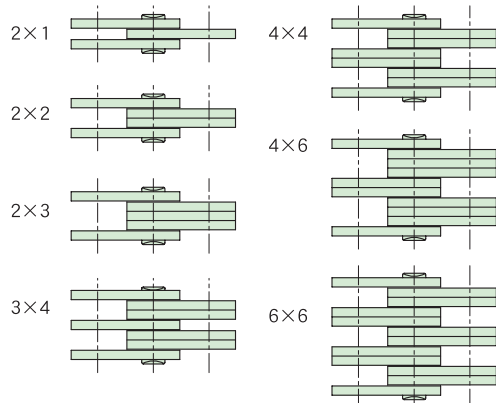

各部寸法表

(単位: mm)

E K チェーン 番号	ピッチ P	プレート 組合せ 枚数	プレート		ピン		最小引張強さ		最大許容張力		概略 質量 kg/m	金具						
			幅 max.H	厚さ T	外径 D	長さ G	kN	kgf	kN	kgf		d (最小)	R (最大)	U (最小)	C	U 1 (最小)	W (最大)	U 2 (最小)
EK BL- 421		2 × 1				8.40	11.7	1200	1.5	160	0.44				—	2.2	2.0	—
EK BL- 422		2 × 2				10.80	23.5	2400	3.1	320	0.58				—	4.3	4.1	—
EK BL- 423		2 × 3				12.95	23.5	2400	4.4	450	0.72				—	6.4	6.2	—
EK BL- 434	12.70	3 × 4	12.0	2.0	5.06	17.30	37.2	3800	5.0	510	0.99	5.12	6.3	6.3	6.2	4.3	10.5	2.2
EK BL- 444		4 × 4				18.90	49.0	5000	5.2	540	1.13				8.2	4.3	12.1	4.3
EK BL- 446		4 × 6				23.60	49.0	5000	5.8	600	1.41				10.3	6.4	16.8	4.3
EK BL- 466		6 × 6				27.40	73.5	7500	6.1	630	1.68				8.2	4.3	20.5	4.3
EK BL- 521		2 × 1				10.00	19.6	2000	2.6	270	0.70				—	2.7	2.4	—
EK BL- 522		2 × 2				12.90	39.2	4000	5.1	530	0.92				—	5.1	4.9	—
EK BL- 523		2 × 3				15.20	39.2	4000	7.4	760	1.15				—	7.6	7.4	—
EK BL- 534	15.875	3 × 4	15.0	2.4	5.92	20.10	58.8	6000	8.5	870	1.58	6.00	7.9	7.9	7.4	5.1	12.2	2.7
EK BL- 544		4 × 4				22.65	78.4	8000	9.0	920	1.81				9.8	5.1	14.7	5.1
EK BL- 546		4 × 6				27.50	78.4	8000	9.9	1010	2.25				12.3	7.6	19.6	5.1
EK BL- 566		6 × 6				32.50	117.6	12000	10.3	1060	2.69				9.8	5.1	24.6	5.1
EK BL- 622		2 × 2				16.40	68.6	7000	7.6	780	1.39				—	6.8	6.5	—
EK BL- 623		2 × 3				19.90	68.6	7000	10.8	1110	1.72				—	10.2	9.8	—
EK BL- 634	19.05	3 × 4	18.1	3.2	7.93	26.40	102.9	10500	12.4	1270	2.38	8.00	9.5	9.5	9.9	6.8	16.5	3.5
EK BL- 644		4 × 4				29.60	137.2	14000	13.2	1350	2.70				13.2	6.8	19.7	6.8
EK BL- 646		4 × 6				36.50	137.2	14000	14.4	1470	3.36				18.5	10.2	26.6	6.8
EK BL- 666		6 × 6				42.80	205.9	21000	15.2	1550	4.01				13.2	6.8	32.9	6.8
EK BL- 822		2 × 2				20.50	102.9	10500	13.2	1350	2.30				—	8.5	8.1	—
EK BL- 823		2 × 3				24.60	102.9	10500	19.8	2020	2.84				—	12.7	12.2	—
EK BL- 834	25.40	3 × 4	24.1	4.0	9.53	32.70	154.9	15800	22.5	2300	3.94	9.60	12.7	12.7	12.3	8.5	20.4	4.5
EK BL- 844		4 × 4				36.80	205.9	21000	23.9	2440	4.49				16.4	8.5	24.5	8.5
EK BL- 846		4 × 6				44.90	205.9	21000	26.2	2680	5.58				20.5	12.7	32.6	8.5
EK BL- 866		6 × 6				53.30	308.9	31500	27.5	2810	6.68				16.4	8.5	41.0	8.5
EK BL- 1022		2 × 2				24.40	151.0	15400	20.3	2080	3.45				—	10.1	9.7	—
EK BL- 1023		2 × 3				29.30	151.0	15400	32.1	3280	4.29				—	15.1	14.6	—
EK BL- 1034	31.75	3 × 4	30.0	4.8	11.10	39.20	225.5	23000	36.6	3740	5.97	11.15	15.8	15.8	14.6	10.1	24.5	5.5
EK BL- 1044		4 × 4				43.90	282.4	28800	38.9	3970	6.80				19.4	10.1	29.2	10.1
EK BL- 1046		4 × 6				53.60	282.4	28800	42.6	4350	8.47				24.3	15.1	38.9	10.1
EK BL- 1066		6 × 6				63.30	421.6	43000	44.8	4570	10.14				19.4	10.1	48.5	10.1
EK BL- 1223		2 × 3				33.50	196.1	20000	49.6	5060	5.53				—	17.5	17.0	—
EK BL- 1234		3 × 4				45.10	313.8	32000	56.5	5770	7.69				17.2	11.9	28.6	6.0
EK BL- 1244	38.10	4 × 4	36.2	5.6	12.70	51.50	392.2	40000	60.6	6120	8.79	12.75	19.0	19.0	22.9	11.9	34.8	11.9
EK BL- 1246		4 × 6				62.20	392.2	40000	65.7	6700	10.93				28.7	17.5	45.7	11.9
EK BL- 1266		6 × 6				73.00	588.3	60000	69.1	7050	13.11				22.9	11.9	57.3	11.9
EK BL- 1423		2 × 3				38.50	235.3	24000	65.3	6660	8.15				—	20.1	19.4	—
EK BL- 1434		3 × 4				52.00	387.3	39500	71.5	7300	11.34				19.5	13.5	32.9	7.0
EK BL- 1444	44.45	4 × 4	42.2	6.4	14.28	58.50	470.7	48000	74.5	7600	12.93	14.35	22.2	22.2	26.0	13.5	39.4	13.5
EK BL- 1446		4 × 6				71.00	470.7	48000	86.4	8820	16.09				32.6	20.1	51.9	13.5
EK BL- 1466		6 × 6				84.40	706.0	72000	90.9	9270	19.28				26.0	13.5	65.1	13.5
EK BL- 1623		2 × 3				44.50	357.9	36500	77.2	7880	10.51				—	22.8	21.9	—
EK BL- 1634		3 × 4				59.50	559.9	57100	85.3	8700	14.61				22.3	15.5	36.9	8.0
EK BL- 1644	50.80	4 × 4	48.2	7.2	17.45	67.00	715.8	73000	91.2	9300	16.65	17.55	25.4	25.4	29.8	15.5	43.9	15.5
EK BL- 1646		4 × 6				82.00	715.8	73000	107.8	11000	20.76				37.2	22.8	59.4	15.5
EK BL- 1666		6 × 6				97.00	1073.8	109500	113.7	11600	24.86				29.8	15.5	74.4	15.5

注) 1. 金具の材質は、構造用合金鋼 (SCM435 など) を使用し、熱処理硬さを 40 ~ 45HRC としてください。
2. 標準列数以外の特殊列数も製作いたします。